



T-Series High Power Laser Diode Module

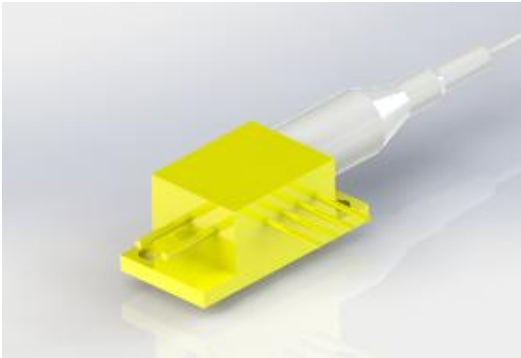


- | | |
|--------------|--|
| Features | ◆ High output power of 7 W |
| | ◆ 105μm/0.22NA multimode optical fiber |
| | ◆ Center wavelength 808±3nm |
| Applications | ◆ Solid-state laser pumping |
| | ◆ Material processing |

Package Dimensions (mm)

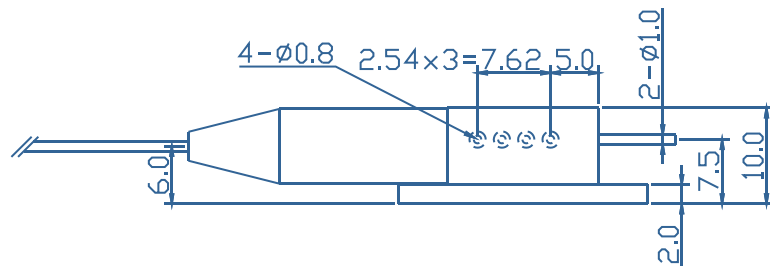

Pin-out Assignment	
Pin	Function
1	LD (+)
2	LD (-)
3	Thermistor
4	Thermistor
5	PD (N)
6	PD (P)

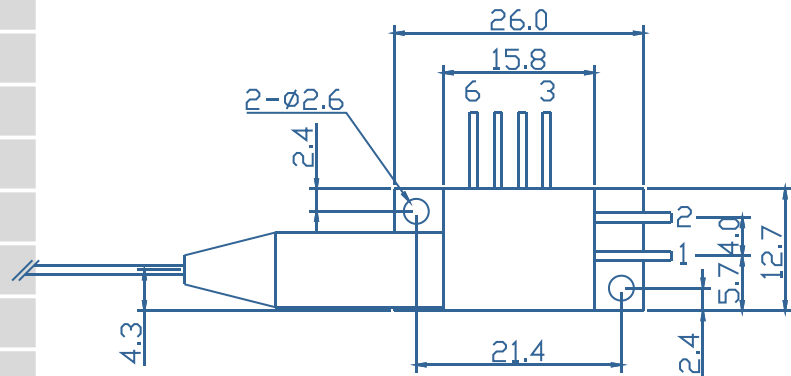

Typical Device Performance (25°C)

	Min	Typical	Max	Unit
Optical				
CW Output Power	-	7	-	W
Center Wavelength	-	808±3	-	nm
Spectral Width (90% of Power)	-	<10.0	-	nm
Wavelength Shift with Temperature	-	0.3	-	nm / °C
Electrical				
Threshold Current	-	1.6	-	A
Operating Current	-	8.5	-	A
Operating Voltage	-	1.9	-	V
Slope Efficiency	-	1	-	W / A
Power Conversion Efficiency	-	44	-	%
Fiber*				
Fiber Core Diameter	-	105	-	μm
Fiber Cladding Diameter	-	125	-	μm
Fiber Buffer Diameter	-	250	-	μm
Numerical Aperture	-	0.22	-	-
Fiber Length	-	1-5	-	m
Fiber Connector	-	-	-	-

* Customized fiber and connector available.

Absolute Ratings

	Min	Max	Unit
Operating Temperature	15	35	°C
Operating Relative Humidity	-	75	%
Cooling Mode	-	水冷 (25°C)	-
Storage Temperature	-20	80	°C
Storage Relative Humidity	-	90	%
Lead Soldering Temperature (10 s max)	-	250	°C

This instruction is for reference only. Han's TCS improves its products continually, therefore may change specifications without notice to customers, for details, please contact with Han's TCS sales.

@2022 Han's TianCheng Semiconductor Co., Ltd. All rights reserved.